



## Global<sup>®</sup> CB 2700 Series - Top and bottom coverstitch machines

### TECHNICAL SPECIFICATIONS

Machine speed\*

5500 spm

CB 2722/2723 - 4500 spm

Stitch type

602 or 605

Number of needles

2 or 3

Needle gauges

4.8 - 5.6 - 6.4 mm

Feed type

differential feed

Differential feed ratio

1:0.3 - 1:2.9

Stitch length

min. 1.4 mm

max. 3.6 mm

Presser foot lift

up to 7 mm

Needle type

UY 128 Gas

Bed type

cylinder

**CB 2702 / 2703** - High speed, top and bottom cover chainstitch machines, cylinder arm, fully automatic lubrication and differential feed.

**CB 2712 / 2713** - High speed, top and bottom cover chainstitch machines, cylinder arm, fully automatic lubrication and differential feed. Machine is equipped for binding work.

**CB 2722 / 2723** - High speed, top and bottom cover chainstitch machines, cylinder arm, fully automatic lubrication, differential feed and puller.

### MÁQUINAS RECUBRIDORAS

**CB 2702 / 2703** - Máquina recubridora superior e inferior de alta velocidad, puntada de cadeneta, brazo cilíndrico, lubricación completamente automática, arrastre diferencial.

**CB 2712 / 2713** - Máquina recubridora superior e inferior de alta velocidad, puntada de cadeneta, brazo cilíndrico, lubricación completamente automática, arrastre diferencial para operaciones de collarines.

**CB 2722 / 2723** - Máquina recubridora superior e inferior de alta velocidad, puntada de cadeneta, brazo cilíndrico, lubricación completamente automática, arrastre diferencial y puller.

### ÜBERDECKNAHT-MASCHINEN

**CB 2702 / 2703** - Hochleistungs- Zylinder Überdecknahtmaschinen mit Differentialtransport, vollautomatisch geschmiert.

**CB 2712 / 2713** - Hochleistungs- Zylinder Überdecknahtmaschinen mit Differentialtransport, vollautomatisch geschmiert, für Börtchenapparat.

**CB 2722 / 2723** - Hochleistungs- Zylinder Überdecknahtmaschinen mit Differentialtransport, vollautomatisch geschmiert mit Puller.

### MACHINE CANON

**CB 2702 / 2703** - Machine canon point de chaînette à grande vitesse, lubrification entièrement automatique et griffe différentielle.

**CB 2712 / 2713** - Machine canon point de chaînette à grande vitesse, lubrification entièrement automatique et griffe différentielle pour opération de pose collerette.



**CB 2722 / 2723** - Machine canon point de chaînette à grande vitesse, lubrification entièrement automatique, griffe différentielle et puller.

## Global CB 2700 Series

The Global CB 2700 Series are high quality 2 or 3 needle cylinder bed machines with top and bottom cover stitch and improved differential feed mechanism.

### Some features of the Global® CB 2700 Series

- swing-up type looper for easy threading
- fully automatic lubrication
- high quality precision parts
- interchangeable oil-filter
- high speed: up to 5500 spm
- vibration free
- cylinder dimensions: (w x h)  
90 x 60 mm

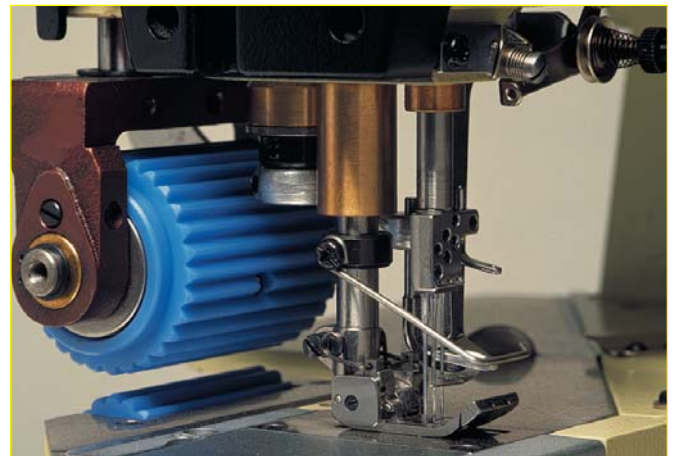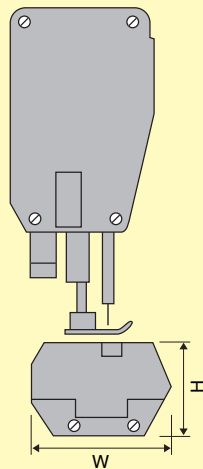

Global® model CB 2723-64 - with puller



Global® model CB 2703-64 cylinder-bed model

### Specifications

model	number of needles	number of threads	needle distance			binder	puller	outside stitch length mm	differential feed ratio mm	presser foot lift	needle system	max. sewing speed*
			4.8 mm	5.6 mm	6.4 mm							
CB 2702	2	4	●	—	—	—	—	1.4 - 3.6	1:03 - 1:2.9	7	UY128GAS	5500
CB 2703	3	5	—	●	●	—	—	1.4 - 3.6	1:03 - 1:2.9	7	UY128GAS	5500
CB 2712	2	4	●	—	—	●	—	1.4 - 3.6	1:03 - 1:2.9	7	UY128GAS	5500
CB 2713	3	5	—	●	●	●	—	1.4 - 3.6	1:03 - 1:2.9	7	UY128GAS	5500
CB 2722	2	4	●	—	—	—	●	1.4 - 3.6	1:03 - 1:2.9	7	UY128GAS	4500
CB 2723	3	5	—	●	●	—	●	1.4 - 3.6	1:03 - 1:2.9	7	UY128GAS	4500

★ Max. sewing speed (in spm.) depends on type of operation and/or materials to be sewn.

The GLOBAL® Selection is brought to you by:

GLOBAL® is a trademark of the Global International Corporation, the people that carefully organize the supply of spareparts before they launch each product.

When ordering parts please specify:  
 1 machine model  
 2 part numbers